

**2500KG** | **Swing Arms** | **Button**  
Lifting Capacity | Find Picking Up Points Easily | Control




**EE-612E**  
Mobile Type



**EE-612FE**  
Fixed Type

**OVERALL DIMENSION**

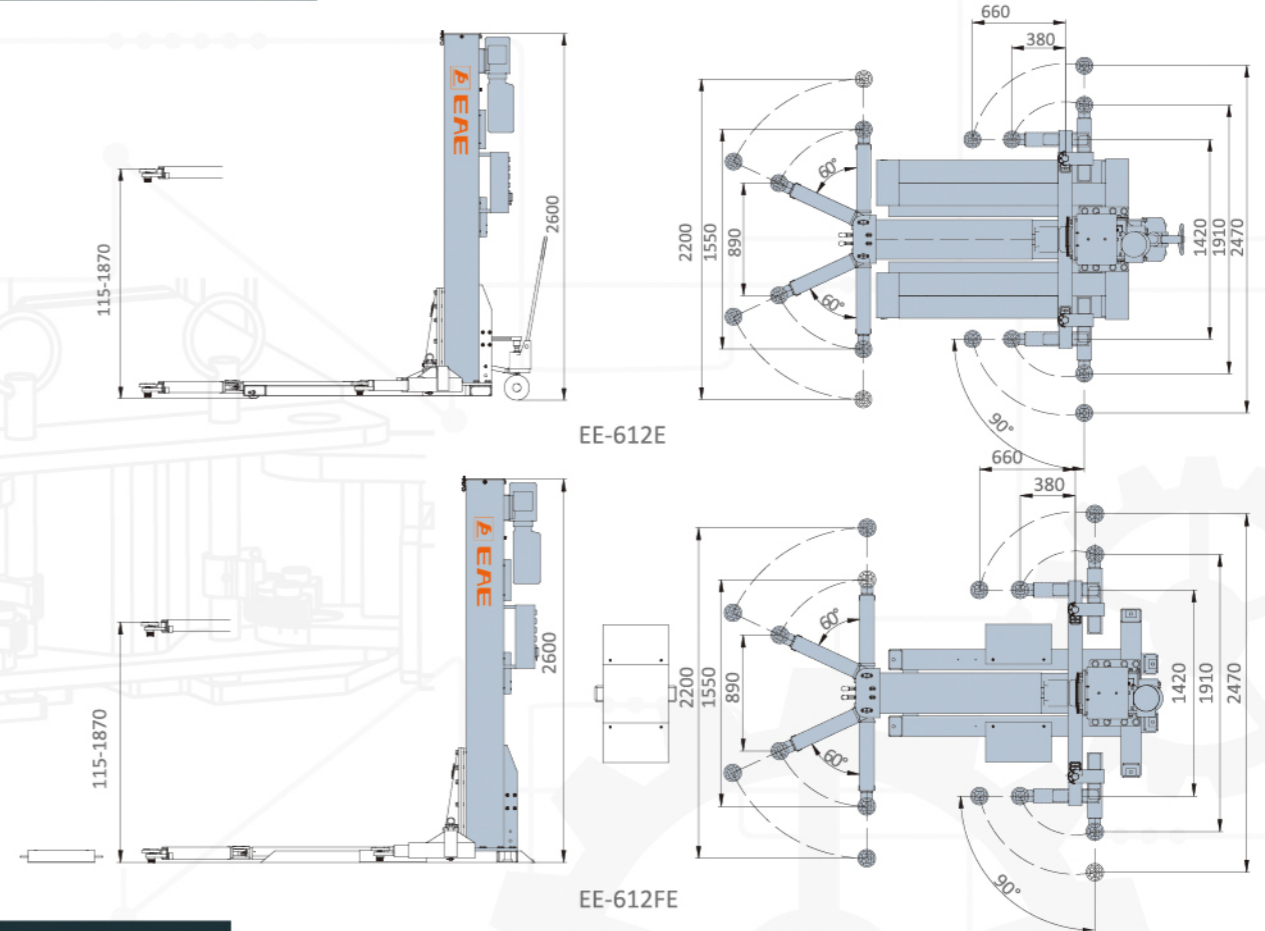

**TECHNICAL DATA**

MODEL NO.	EE-612E	EE-612FE
Lifting capacity	2500kg	2500kg
Max. lifting height	1870mm	1870mm
Min. height	115mm	115mm
Lifting time	50S	50S
Motor	2.2kW	2.2kW
Weight	910kg	860kg
Electricity supply	According To Customer Needs	


\* Machine shown with optional equipment. Actual product appearance may differ.




**EE-612E/612FE**

**SINGLE POST LIFT**

- CE certificated.
- Mobile Positioning based on Pallet Jack System.
- Electrical Safety Lock Release System.
- Aluminum Motor.
- Screw Action Height Adjustable Pads with clearance height  $\leq 115$ mm.
- Powder Coated Finish.
- Door Protection Pads.
- ABS Control Box.
- Anti-Surge Hydraulic Valve.
- Hydraulic overload protection.
- Reserved Hydraulic Connection for an Optional Manually Operated Pump.
- Installation and Operation Manual and Labels in Chinese, English, Spanish, German, French, Russian, Swedish (Other Languages Available Upon Request).



Rear lifting arm




Roller Inside Base(EE-612E)



Release Handle



Round Screw-up Lifting Pad



Base (EE-612FE)

