

## AIR COILED HOSES

**10m 53629** 8mm  
5mm  
connector 1/4" 0,55 6 390  
Kg SUB ff

**15m 53630** 8mm  
5mm  
connector 1/4" 0,65 6 240  
Kg SUB ff


**15m 53631** 12mm  
8mm  
connector 1/4" 1,40 6 132  
Kg SUB ff

**15m 53632** 15mm  
10mm  
connector 1/4" 2,20 6 78  
Kg SUB ff

**15m 53633** 15mm  
10mm  
connector 3/8" 2,10 6 78  
Kg SUB ff

**15m 53634** 18mm  
13mm  
connector 1/2" 2,60 6 66  
Kg SUB ff

WITH 360 DEGREE SWIVEL ENDS FOR EASY MOVEMENT AND EASE OF USE

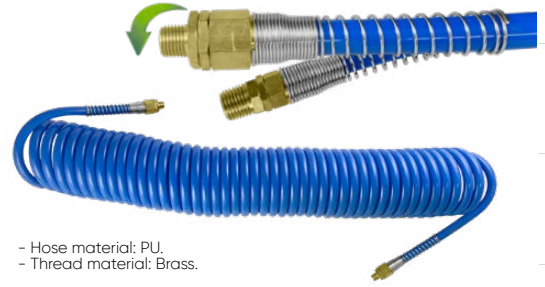

- Hose material: PU.  
- Thread material: Brass.

## AIR HOSE

**53594** 3,05 4 64  
Kg SUB ff

**53595** 3,20 4 64  
Kg SUB ff

**25m** 300 PSI  
20 BAR



- Work pressure: 300PSI / 20bar.
- Breakage pressure: 950PSI / 65bar.
- Work temperature: -40°C / 65°C
- Great flexibility.
- Return to its original form.
- Smooth surface, does not damage paint.
- Very resistant.



Inside diameter: 8mm  
External diameter: 13mm  
To use with:  
Ref. 52736 M8



Inside diameter: 10mm  
External diameter: 15mm  
To use with:  
Ref. 52737 M10



HYBRID POLYMER



x10

SET OF 10 CLAMPS  
8-16mm

0,04 10 100  
Kg SUB ff

14169

## SECURITY LOCK QUICK CONNECTOR HOSE CONNECTION

**14201**

**14202**

**14203**



0,1 25 100  
Kg SUB ff

0,1 25 100  
Kg SUB ff

0,1 25 100  
Kg SUB ff



## SWIVEL ADAPTOR FOR COMPRESSED AIR - MALE

**14314** EUR  
1/4"

**14315** US  
1/4"



0,1 25 100  
Kg SUB ff

0,1 25 100  
Kg SUB ff



## HOSE CONNECTOR

REF.	DESCRIPTION	Kg	€
14204	EUR - M6	0,10	
14205	EUR - M8	0,10	
14206	EUR - M10	0,10	
14207	US - M6	0,10	
14208	US - M8	0,10	
14209	US - M10	0,10	



M 1/4"



F 1/4"



M 3/8"

14205



F 3/8"

14208



M 1/2"

14206



F 1/2"

14209

50 200  
SUB ff



## SECURITY LOCK QUICK CONNECTOR

REF.	DESCRIPTION	Kg	€
14195	FEMALE - 1/4" MALE THREAD	0,10	
14196	FEMALE - 3/8" MALE THREAD	0,10	
14197	FEMALE - 1/2" MALE THREAD	0,10	
14198	FEMALE - 1/4" FEMALE THREAD	0,10	
14199	FEMALE - 3/8" FEMALE THREAD	0,10	
14200	FEMALE - 1/2" FEMALE THREAD	0,10	



M 1/4"

14195



M 3/8"

14196



M 1/2"

14197



F 1/4"

14198



F 3/8"

14199



F 1/2"

14200

25 100  
SUB ff



EUR.



UNIVERSAL



US