

1/2" OIL HOSE REEL 15M

50797

26,6 Kg 1 14

Oil base/spool
Hose length: 15+1 m
Max working pressure: 2450 PSI
Air inlet: 1/2" BSPT
Air Outlet 1/2" BSPT
Material: Steel




SUCTION GUNS TRANSPARENTS

52498

0,86 Kg 6 126 1500ml

- Fabricated for polypropylene.
- Transparent body.
- Fit for transmissions and differential.
- Resistent to brakes liquid and antifreeze.

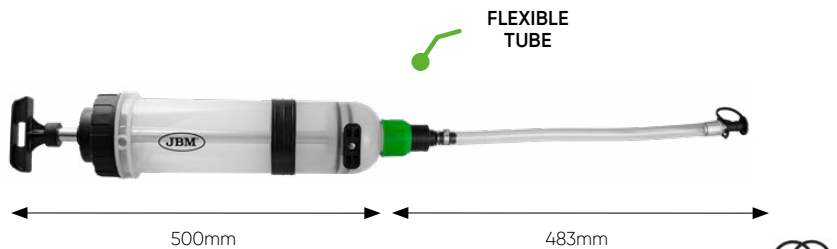

FLEXIBLE TUBE



O-RINGS REPLACEMENT (X2) FOR REF. 52498

0,03 Kg 50 150 11867



52628

0,3 Kg 5 20 450 200ml

- Useful for brake liquid.
- Connector exterior.



FLEXIBLE TUBE




SUCTION GUN OIL

51928

0,82 Kg 5 20 360 500ml

CHRO-MED

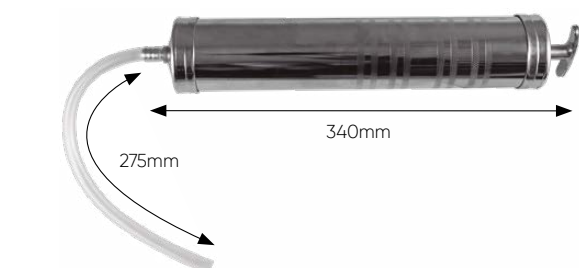

QUICK RELEASE GREASE COUPLER

53592

0,15 Kg 25 100

Recommended to be used with JBM grease guns ref. 50751 and ref. 50852, although it can be used on most hand, battery powered or air grease guns and bulk grease pumps.

- Ergonomic thumb lever design makes coupling and uncoupling effortless and saving time.
- Compatible with all sizes / forms and it fits all SAE and metric grease fittings.
- Integrated Non-Return Valve enables unit to be disconnected easily at pressures up to 15.000PSI (1.034Bar).
- Integrated 1/8" NPT Connection.



- Hardened 3-Jaws withstands high pressures without deformation.

