



# WULKAN 360HP

for wheels for passenger cars, vans, off-road vehicles and SUVs up to 360 mm wide with any type of rims and tyres, with water heating system and pneumatic wheel stabilisation system

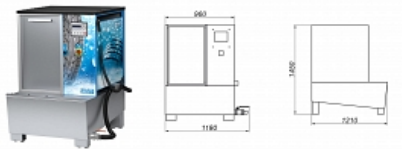

## Standard colours



## Standard equipment



## General features

- computer control
- software in 6 languages
- user-friendly display
- servomotor with an arm keeping narrower wheels in vertical position
- sedimentation tank separated from washing chamber
- triple acoustic insulation system (rubber lining, perforated PVC shield, foam)
- anti-vibration rubber feet
- shut-off ball valve
- attractive graphic design

## Heating system

- heater power - 4 kW 400 V
- water heating time to 50°C: 60 - 120 min
- overheating protection

## Standard equipment

- WULKAN MIX granulate 25 kg
- granulate basket
- WULKAN TURBO washing concentrate 30 l
- plastic protective cover
- rubber anti slip mat 2 pcs
- air blow gun

## Optional accessories

- pneumatic rotary lift WL360

## Technical data

Wheel diameter range	560 - 800 mm
Wheel width range	135 - 360 mm
Maximum weight of wheel	60 kg
Washing times, factory set (adjustable, 3 programmes)	30, 60, 90 sec
Drying time, factory set (adjustable, 1 programme)	15 sec
Water heating time to 50°C	60 - 120 min
Heater power	4 kW 400 V
Pump drive 3-phase 400 V, 50 Hz, 5.5 kW	2900 rpm
Pump efficiency	600 lpm
Wheel drive 3-phase 400 V, 50 Hz, 0.37 kW	930 rpm
Motors and drive power	6 kW
Water pressure	4 bar
Quantity of water	300 l
Quantity of WULKAN MIX granulate	20 kg
Quantity of WULKAN TURBO washing concentrate	1 l

<b>Compressed air working pressure</b>	8 - 12 bar
<b>Average sound level</b>	79.5 dB(A)
<b>Dimensions (width x depth x height)</b>	1190 x 1210 x 1450 mm
<b>Net weight</b>	330 kg
<b>Maximum limiting number of washing process starts (service lock)</b>	500 starts

\*/\*\*adjustable only in the production stage