

FIXED CLOSED HOSE REELS IN PAINTED STEEL

FOR AIR-WATER 28 bar

Equipped with:

- Black synthetic rubber hoses R6
- Galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals



CF-500	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	074-4502-300	without hose	-	-	F1/2"G - M3/8"G
	074-4502-400	without hose	-	-	F1/2"G - M1/2"G
	074-4502-212	12 m	5/16"	28 bar	F1/2"G - M1/4"G
	074-4502-218	18 m	5/16"	28 bar	F1/2"G - M1/4"G
	074-4502-310	10 m	3/8"	28 bar	F1/2"G - M3/8"G
	074-4502-318	18 m	3/8"	28 bar	F1/2"G - M3/8"G
	074-4502-410	10 m	1/2"	28 bar	F1/2"G - M1/2"G
	074-4502-415	15 m	1/2"	28 bar	F1/2"G - M1/2"G

FOR WATER 150° C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals



CF-500	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	074-4505-300	without hose	-	-	F1/2"G - M3/8"G
	074-4504-210	10 m	5/16"	200 bar	F1/2"G - M3/8"G
	074-4504-215	15 m	5/16"	200 bar	F1/2"G - M3/8"G
	074-4504-310	10 m	3/8"	200 bar	F1/2"G - F3/8"G
	074-4504-315	15 m	3/8"	200 bar	F1/2"G - F3/8"G
	074-4504-318	18 m	3/8"	200 bar	F1/2"G - F3/8"G


FOR WATER 150° C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals



CF-500	Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
	074-4505-300	without hose	-	-	F1/2"G - M3/8"G
	074-4505-310	10 m	3/8"	400 bar	F1/2"G - F3/8"G
	074-4505-315	15 m	3/8"	400 bar	F1/2"G - F3/8"G
	074-4505-318	18 m	3/8"	400 bar	F1/2"G - F3/8"G

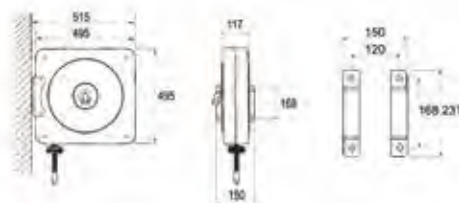

CF-500 22,900<29,850 0,094 1