

# SWIVELLING CLOSED HOSE REELS IN AISI 304 STAINLESS STEEL

## FOR AIR-WATER 28 bar

Equipped with:

- Black synthetic rubber hoses R6
- Galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 075-5502-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 075-5502-400 | without hose | -      | -            | F1/2"G - M1/2"G |
| 075-5502-212 | 12 m         | 5/16"  | 28 bar       | F1/2"G - M1/4"G |
| 075-5502-218 | 18 m         | 5/16"  | 28 bar       | F1/2"G - M1/4"G |
| 075-5502-310 | 10 m         | 3/8"   | 28 bar       | F1/2"G - M3/8"G |
| 075-5502-318 | 18 m         | 3/8"   | 28 bar       | F1/2"G - M3/8"G |
| 075-5502-410 | 10 m         | 1/2"   | 28 bar       | F1/2"G - M1/2"G |
| 075-5502-415 | 15 m         | 1/2"   | 28 bar       | F1/2"G - M1/2"G |

CSX-500



## FOR WATER 150 °C 200 bar

Equipped with:

- Blue no trace synthetic rubber hoses 1SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 075-5505-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 075-5504-210 | 10 m         | 5/16"  | 200 bar      | F1/2"G - M3/8"G |
| 075-5504-215 | 15 m         | 5/16"  | 200 bar      | F1/2"G - M3/8"G |
| 075-5504-310 | 10 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 075-5504-315 | 15 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |
| 075-5504-318 | 18 m         | 3/8"   | 200 bar      | F1/2"G - F3/8"G |

CSX-500




## FOR WATER 150 °C 400 bar

Equipped with:

- Blue no trace synthetic rubber hoses 2SC
- Galvanized steel connections
- AISI 304 stainless steel 90° swivelling joint
- Teflon seals

| Article      | L. hose      | Ø hose | Max pressure | Inlet-Outlet    |
|--------------|--------------|--------|--------------|-----------------|
| 075-5505-300 | without hose | -      | -            | F1/2"G - M3/8"G |
| 075-5505-310 | 10 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
| 075-5505-315 | 15 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |
| 075-5505-318 | 18 m         | 3/8"   | 400 bar      | F1/2"G - F3/8"G |

CSX-500

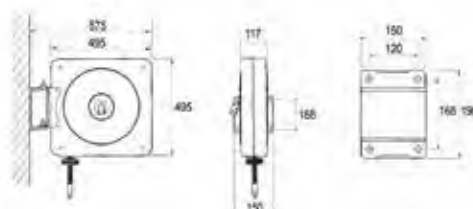

CSX-500 23,600<30,550 0,094 1