

FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



CFX-500	Article	Hose length	Ø hose	Inlet-outlet
	074-5502-300	Without hose	-	F3/8"G - M3/8"G
	074-5502-400	Without hose	-	M1/2"G - M1/2"G
	074-5502-212	12 m	5/16"	F3/8"G - M1/4"G
	074-5502-218	18 m	5/16"	F3/8"G - M1/4"G
	074-5502-310	10 m	3/8"	F3/8"G - M3/8"G
	074-5502-318	18 m	3/8"	F3/8"G - M3/8"G
	074-5502-410	10 m	1/2"	M1/2"G - M1/2"G
	074-5502-415	15 m	1/2"	M1/2"G - M1/2"G
	074-5502-418	18 m	1/2"	M1/2"G - M1/2"G

FOR WATER 150 °C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



CFX-500	Article	Hose length	Ø hose	Inlet-outlet
	074-5505-300	Without hose	-	M3/8"G - M3/8"G
	074-5504-210	10 m	5/16"	M3/8"G - M3/8"G
	074-5504-215	15 m	5/16"	M3/8"G - M3/8"G
	074-5504-310	10 m	3/8"	M3/8"G - F3/8"G
	074-5504-315	15 m	3/8"	M3/8"G - F3/8"G
	074-5504-318	18 m	3/8"	M3/8"G - F3/8"G


FOR WATER 150 °C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



CFX-500	Article	Hose length	Ø hose	Inlet-outlet
	074-5505-300	Without hose	-	M3/8"G - M3/8"G
	074-5505-310	10 m	3/8"	M3/8"G - F3/8"G
	074-5505-315	15 m	3/8"	M3/8"G - F3/8"G
	074-5505-318	18 m	3/8"	M3/8"G - F3/8"G

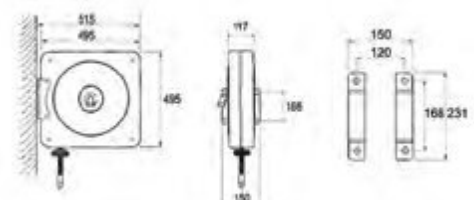

CFX-500 22,900<29,850 0,060 1