


# AMC402

## HYDRAULIC WINCH



**MAX PULL**  
30 kN

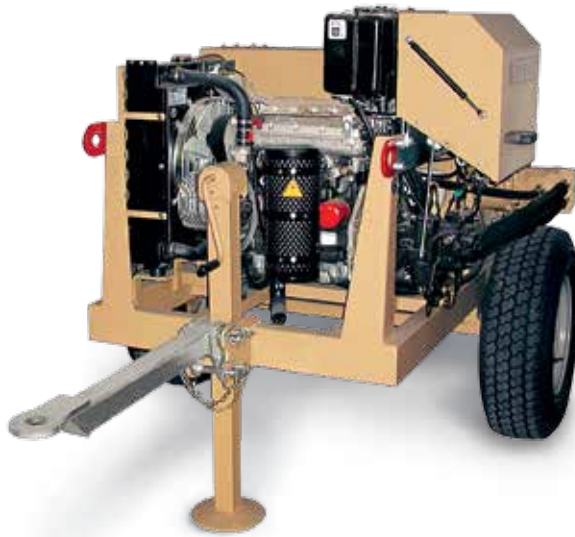

**MAX SPEED**  
5 km/h



**ROPE DIAMETER**  
14 mm

TOP PERFORMANCE

AVAILABLE FOR ROAD USE

### PERFORMANCE \*

Max pull	30 kN
Speed at max pull	1,5 km/h
Max speed	5 km/h
Pull at max speed	8,5 kN

\* at 20°C and at sea level

### HYDRAULIC TRANSMISSION

Closed hydraulic circuit for stepless speed variation in both rotating directions.

### CHARACTERISTICS

#### Drum Specifications

External diameter	530 mm
Internal diameter	355 mm
Width	700 mm
Rope diameter	14 mm
Max capacity	400 m
Weight	1000 kg

### ENGINE



Diesel	25 kW (34 hp)
Cooling system	WATER
Starting system	12 V

### CONFIGURATION

Drum with automatic level wind.  
Negative self-acting hydraulic brake.  
Hydraulic dynamometer with set-point and automatic control of maximum pull.  
Rigid axle 30 km/h.  
Towing shaft with adjustable height.  
Mechanical front stabiliser.

### AVAILABLE DEVICES

<b>ALL102</b>	Pulling rope locking device when capstan is used (compulsory for EC market).	
<b>ALL112</b>	Trailer 80 km/h. EC type-approved for road circulation with hook Ø 40 mm and lighting system.	
	<b>Capstan for lifting operations</b>	
<b>ALL107</b>	Max pul	10 kN
	Max speed	1,5 km/h
	Capstan diameter	220 mm

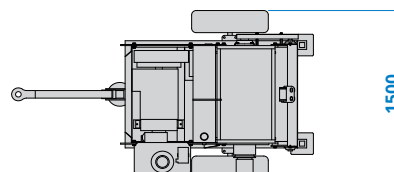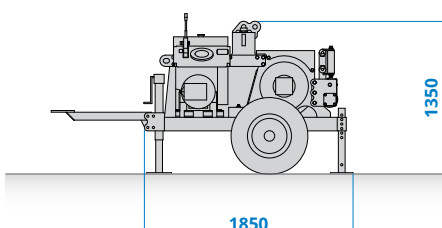

AMC402 with ALL112

