

CDT

SPECIAL DRIVER WITH FIXED WEDGES FOR STEEL CONDUCTOR REELS
(Reel drawing is required)

SPECIAL MODELS AVAILABLE ONDEMAND




CDT

CDT suitable for CVI600

MODEL	REEL WIDTH		HOLE DIAMETER		HOLE SPACING		PIN HOLE	SPOKE WIDTH
	B min	B max	D min	D max	min	max	H min	S max
CDT105	820	1190	85	115	275	300	50 - 60	
CDT118	870	1080	95	115	340	410	43	
CDT153	940	1390	90	120	445	475	51	
CDT068	1050	1280	120	140	230	315	61	
CDT003	1060	1280	80	100	360	420		73
CDT073	1160	1530	115	145	380	410	63	
CDT056	1160	1530	80	100	420	480		73
CDT133	1200	1650	100	120	280	320	64	
CDT075	1300	1520	100	120	360	420		163
CDT130	1370	1870	110	155	160	320	51	

CDT suitable for CVI810

MODEL	REEL WIDTH		HOLE DIAMETER		HOLE SPACING		PIN HOLE	SPOKE WIDTH
	B min	B max	D min	D max	min	max	H min	S max
CDT120	910	1310	100	125	430	510		155
CDT103	1370	1470	90	150	255	325	60	
CDT119	1590	1980	110	155	265	335	60	

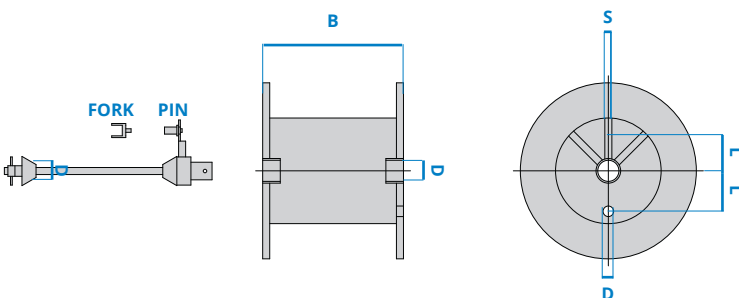

Pictures & drawings can be different according to technical specifications - updating programme variations without notice are possible.

Certified Quality System
ISO 9001:2015

Certified Environmental System
ISO 14001:2015

Certified Health & Safety System
ISO 45001:2018