

RB

FOUR OR FIVE BUNDLED CONDUCTORS BALANCING HEAD BOARDS

RF

FOUR OR FIVE BUNDLED CONDUCTORS FIXED HEAD BOARDS



RF


MODEL	DIMENSIONS [MM]				WORKING LOAD [kN]	WEIGHT [kg]	FOR STRINGING BLOCKS		EQUIPMENT		
	A	B	C	D			STANDARD	HELICOPTER	SWIVEL JOINTS		STEEL ROPE SECTION Ø 18
									GGT020	GGT030	
RFQ060	100	292	535	144	93	125	CAQ614	CEQ609	4	1	No.
RFQ410	100	292	535	144	120	128	CAQ814	CEQ808			4-3.5 m
RFQ070	130	340	643	144	93	133	CAQ615	CEQ612	4	1	No.
RFQ420	130	340	643	144	150	136	CAQ815	CEQ809			4-3.5 m
RFQ080	148	298	637	144	93	132	CSQ602	-	4	1	No.
RFQ430	148	298	637	144	120	135	CSQ802	-			4-3.5 m
RFQ090	178	356	755	144	93	136	CSQ603	-	4	1	No.
RFQ440	178	356	755	144	150	140	CSQ803	CSQ002			4-3.5 m
RFQ100	130	340	650	175	250	230	CAQ615	CEQ612	4	GGT040	No.
							CAQ815	CEQ809			
							CAQ008	CEQ003			

CHARACTERISTICS


Specifically designed to connect the pulling rope, max 28 mm diameter, with 4 and 5 bundled conductors. The equipment includes the necessary rope lengths and swivel joints; quantity and models are indicated in the following tables. Special models with different characteristics are available on demand.

RB

MODEL	DIMENSIONS [MM]				WORKING LOAD [kN]	WEIGHT [kg]	FOR STRINGING BLOCKS		EQUIPMENT		
	A	B	C	D			STANDARD	HELICOPTER	SWIVEL JOINTS		STEEL ROPE SECTION Ø 18
									GGT020	GGT030	
RBQ040	100	292	540	150	93	190	CAQ614	CEQ609	4	1	No.
RBQ710	100	292	540	150	120	193	CAQ814	CEQ808			2-30 m
RBQ050	130	340	648	160	93	205	CAQ615	CEQ612	4	1 GGT040	No.
RBQ720	130	340	648	160	150	208	CAQ815	CEQ809			2-30 m
RBQ060	148	298	640	160	93	205	CSQ602	-	4	1	No.
RBQ730	148	298	640	160	120	208	CSQ802	-			2-30 m
RBQ070	178	356	760	160	93	210	CSQ603	-	4	1 GGT040	No.
RBQ740	178	356	760	160	150	212	CSQ803	CSQ002			2-30 m
RBP230	100	292	560	150	93	193	CAQ614	CEQ609	5	1	No.
RBP750	100	292	560	150	120	195	CAQ814	CEQ808			2-30 m
RBP450	130	340	650	160	93	207	CAQ615	CEQ612	5	1	No.
											CAQ815
RBP760	130	340	650	160	150	209	CAQ008	CEQ003	4	1 GGT040	No.
RBQ080	130	340	650	175	250	230					2-30 m
RBP770	130	340	650	175	250	250			4	1 GGT040	No.
											2-30 m
RBE570	130	340	950	200	250	365			6	1	No.
											2-15 m

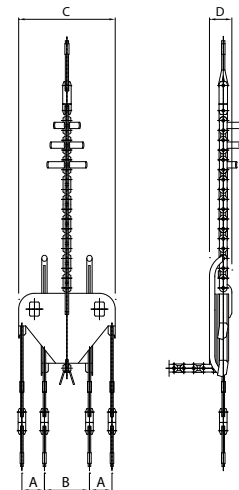

RB

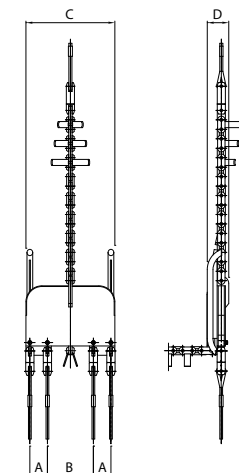

RF

Pictures & drawings can be different according to technical specifications - updating programme variations without notice are possible.