



**412**  
Light curved spoon, short model

L mm	g	code	
285	800	U04120001	1




**412 B**  
Flat serrated spoon for thinning out operations

L mm	g	code	
350	700	U04120002	1




**413 B**  
Hammer with round flat head and horizontal chisel peen  
- Handle in hickory

L mm	a mm	b mm	c mm	code	
290	40	19	140	U04130101	1

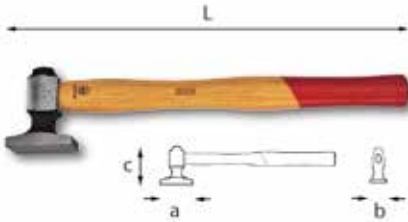


**414 A**  
Hammer with flat rectangular head  
- Handle in hickory

L mm	a mm	b mm	c mm	code	
290	48	30	60	U04140001	1

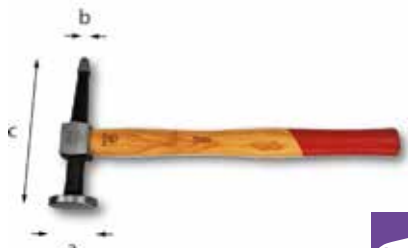

**415 A**  
Hammer with flat round head and straight pointed peen  
- Handle in hickory

L mm	a mm	b mm	c mm	code	
290	40	12	138	U04150001	1

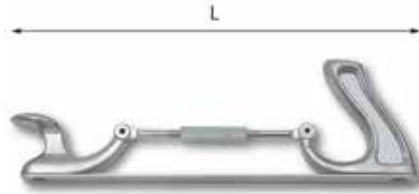

**416 N**  
Adjustable file holder  
- Screw adjustment for matching straight or curved contours  
- Adjustable for two lengths: 300 and 350 mm

L mm	code	
360	U04160002	1



**416 NA**  
Flat flexible files  
- For use with adjustable file holder 416 N

teeth/cm	L mm	cut	code	
3,5	350	standard	U04160004Q	5
4,5	350	fine	U04160005Q	5



**418**  
Oilers  
- Model with retractable rigid metal spout and a screw-type valve in the cap  
- Plastic body

capacity cc	code	
30	U04180001	5
70	U04180002	5
150	U04180003	5



**419**  
Oilers  
- Pump model with rigid metal spout and plastic body

capacity cc	code	
200	U04190001	4
300	U04190002	4
500	U04190003	4



**419 A**  
Spare spout  
- For oilers 419

g	code	
12	U04190011	5



**420**  
Oilers  
- Pump model with flexible metal spout and enamelled sheet steel body  
- Ergonomic plastic handgrip

capacity cc	code	
200	U04200000	4
300	U04200001	4
500	U04200002	4



**420 AR**  
Spare spout  
- For oilers 420

g	code	
30	U04200015	1



**421**  
Lever operated grease pumps  
- Model with automatic grease feed to be filled from a bulk container or from a cartridge  
- Feed pressure 400 bar  
- Supplied with flexible connection 300 mm and four-claw gripping tweezers  
- Threaded connection M10x1  
- Sheet steel body

capacity cc	L mm	code	
500	280	U04210002	1
750	340	U04210003	1
1000	400	U04210004	1