

498 B

Parallel jaw vices for workbenches

- Fully forged steel model with jaws and body in one piece
- Rear jaw shaped like an anvil
- Ground prismatic double guide with screws for regulating the parallelism of the jaws and for recovering tightness of grip
- Supplied with pipe clamp jaws

axbxc mm	d mm	e mm	L mm	â Kg	code	
100x125x74	142	179	345	6,9	U04980012	1
125x150x83	156	198	380	10,7	U04980013	1
150x200x94	183	227	460	18	U04980014	1
175x235x123	216	256	532	25	U04980015	1



498 GA

Protective magnetic jaws

- Aluminium

L mm	â gr	code	
100	180	U04980002Q	1
125	216	U04980003Q	1
150	252	U04980004Q	1



498 GB

Protective magnetic jaws

- Aluminium with rubber coating

L mm	â gr	code	
100	180	U04980012Q	1
125	190	U04980013Q	1
150	200	U04980014Q	1



498 GC

Protective magnetic jaws

- Aluminium with fiber coating

L mm	â gr	code	
100	87	U04980022Q	1
125	99	U04980023Q	1
150	102	U04980024Q	1



498 GD

Pipe clamp jaws

- Steel jaws for vice 498 B 100

LxPxH mm	â gr	code	
41x32x32	320	U04980031Q	1




498 GE

Swivelling support

- For vice 498 B100
- Steel body
- To be used in combination with plans 5002 ZM2

LxPxH mm	â Kg	code	
165x165x22	1,5	U04980035Q	1

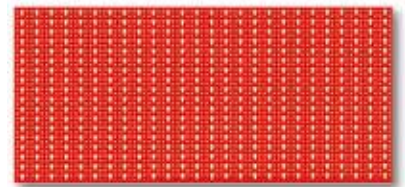

501 P

Perforated panels

- Hole diameter: 5 mm
- Steel sheet, thickness 1,2 mm
- Enamelled finish, colour red RAL 3020
- To be used with hooks 552÷559

size	dimensions (mm)	â Kg	code	
A	1500x800	13,5	U05010104Q	1
B	2000x800	17,5	U05010105Q	1
C	1000x800	9,5	U05010103Q	1