


**THE PRODUCTS OF USAG 493 RANGE ARE
MANUFACTURED IN ITALY AND RESPECT THE
HIGHEST SAFETY AND DURABILITY STANDARDS**



EN 1492-1

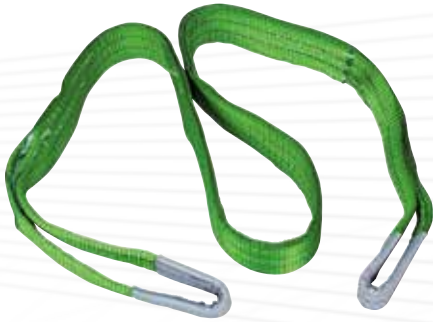

493 A

Two-ply webslings

- Safety coefficient 7:1
- Combination of colours and raising power according to the norms EN 1492-1

CODE	CHARGE	LENGTH
U04930002	1 t	2 m
U04930003	1 t	3 m
U04930004	1 t	4 m
U04930005	1 t	5 m
U04930006	1 t	6 m
U04930012	2 t	2 m
U04930013	2 t	3 m
U04930014	2 t	4 m
U04930015	2 t	5 m
U04930016	2 t	6 m
U04930022	3 t	2 m
U04930023	3 t	3 m
U04930024	3 t	4 m
U04930025	3 t	5 m
U04930026	3 t	6 m



EN 1492-1



493 B

Roundslings

- Structure with wear resistant sheath
- Safety coefficient 7:1
- Combination of colours and raising power according to the norms EN 1492-2

CODE	CHARGE	LENGTH
U04930052	1 t	1 m
U04930053	1 t	1,5 m
U04930054	1 t	2 m
U04930055	1 t	2,5 m
U04930056	1 t	3 m
U04930062	2 t	1 m
U04930063	2 t	1,5 m
U04930064	2 t	2 m
U04930065	2 t	2,5 m
U04930066	2 t	3 m
U04930072	3 t	1 m
U04930073	3 t	1,5 m
U04930074	3 t	2 m
U04930075	3 t	2,5 m
U04930076	3 t	3 m



EN 12195-2

493 C

Anchorage belt

- Belt width 35÷50 mm
- Ratchet-type tensioner 35÷50 mm
- Anchorage charge 1000÷2000 N
- Hook for codes U04930102, U04930103, U04930104
- Double hook for code U04930106
- Reference norm EN 12195-2

CODE	CHARGE	BELT
U04930102	1000 N	35 mm x 4 m
U04930103	1000 N	35 mm x 6 m
U04930104	2000 N	50 mm x 8 m
U04930106	2000 N	50 mm x 10 m